



HEAD OFFICE
17 Tapgeol-gil Ungchon-myeon Ulju-gun Ulsan Korea
Tel.82-52-228-7500 Fax.82-52-268-5578

OVERSEAS DIRECT
Tel.82-52-228-7563 Fax.82-52-228-7530

SEOUL OFFICE
Tel.82-2-2635-1380 Fax.82-2-2635-1382

KUKIL INNTOT CO., LTD.

KUKIL INNTOT is a professional manufacturer of gasket, packing coupling with the latest technology not only for the plant but also the plant maintenance and emergency repair.

NON-ASBESTOS GASKET

Type ' KN 6 '

Product Reference :

K/# KN 6

Description :

Non-asbestos sheet reinforced with carbon steel wire. It has high compressive strength and excellent sealing performance. Although the sealing performance is improved due to the carbon steel wire, its use is limited in places where corrosion is a concern.


Service :

Maximum recommended Temperature : 250°C
Maximum recommended Pressure : 120 kg/cm²

Applications

Water & etc.
Oil & Fuel
Utility Services.

Construction :

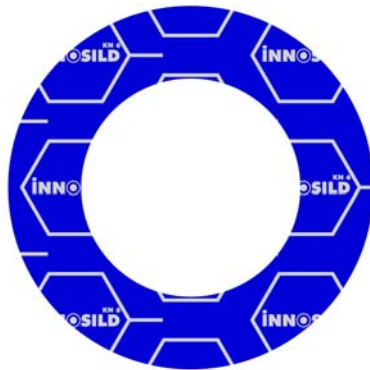

Non Asbestos sheet + carbon steel wire

Gasket Design Data : Standard ASME Section VIII Div.1

Thickness	Gasket Factor " m "	Min. Design Sealing Stress " y "
1.5t, 2.0t	2.75	3,700 psi
3.0t	2	1,600 psi

Availability :

Gasket Size : Max. 1500mm (Non-seam)
Max. 5000mm (seam)
Thickness : 1.5mm , 2.0mm , 3.0mm , etc.

Remark :

- The specification of product is written by manufacturer, and it is changed frequently.
- The recommended flange surface finish for INNOSILD KN 6 gasket is from 125-500AARH